




CITY CRANE MC 45

LKX 1

POTAIN  [®]

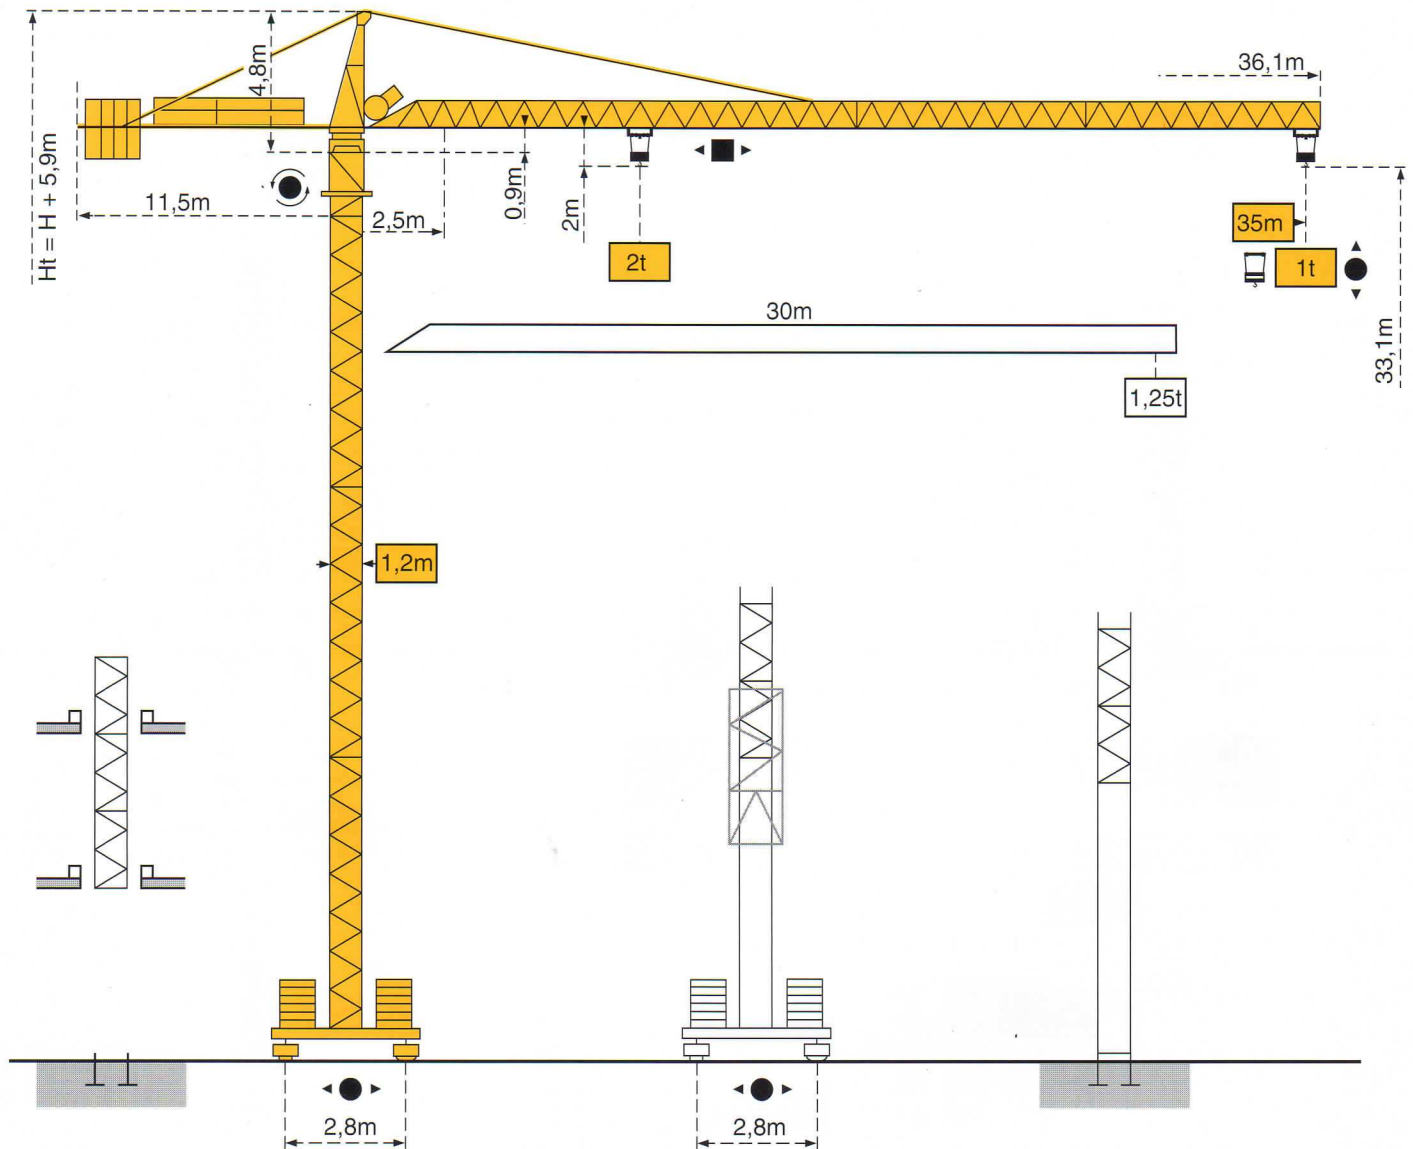


Mats - Maste - Masts - Mástil - Torre



1,2m

Flèche - Ausleger - Jib
Flecha - Braccio
30m → 35m


P 12A

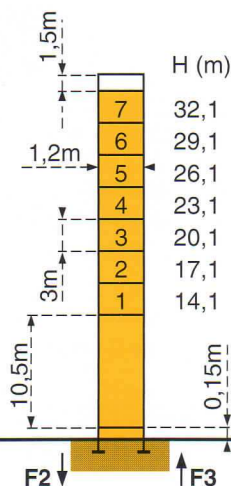

F2	● 40t	■ 55t
F3	● 29t	■ 46t

	14t
--	-----


P 12A

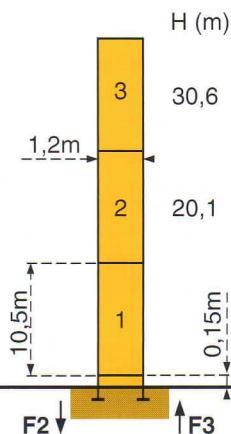

F2	● 36t	■ 44t
F3	● 27t	■ 36t


	11t
--	-----

B 122A

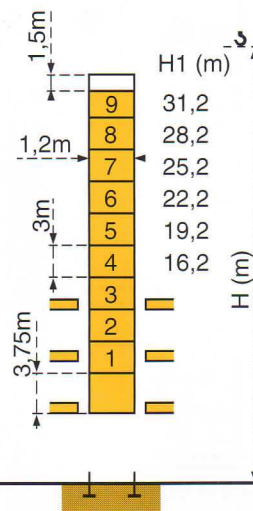

Voir ci-contre
Siehe nebenstehend
See opposite
Ver pagina opuesta
Vedi pagina accanto


ZJ 12A

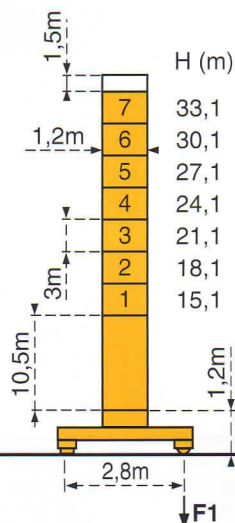

F1	● 33t	■ 45t
----	-------	-------

	17t
--	-----

ZJ 12A

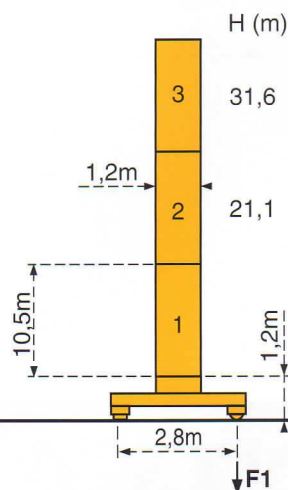

F1	● 29t	■ 36t
----	-------	-------

	14t
--	-----

F = Réactions - Eckdrücke - Reactions - Reacciones - Reazioni



Courbes de charges - Lastkurven - Load diagrams - Curvas de cargas - Curve di carico

 Flèche Ausleger Jib Flecha Braccio


35 m	20,3	22	25	27	30	32	35	m
	2	1,82	1,55	1,41	1,23	1,13	1	t

30 m	20,6	22	25	27	30	m
	2	1,85	1,58	1,43	1,25	t


ZJ

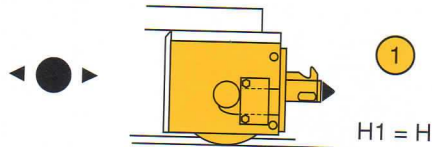

Télescopage sur dalles - Kletterkrane im Gebäude - Climbing crane Telescopage gruas trepadoras - Gru in cavedio

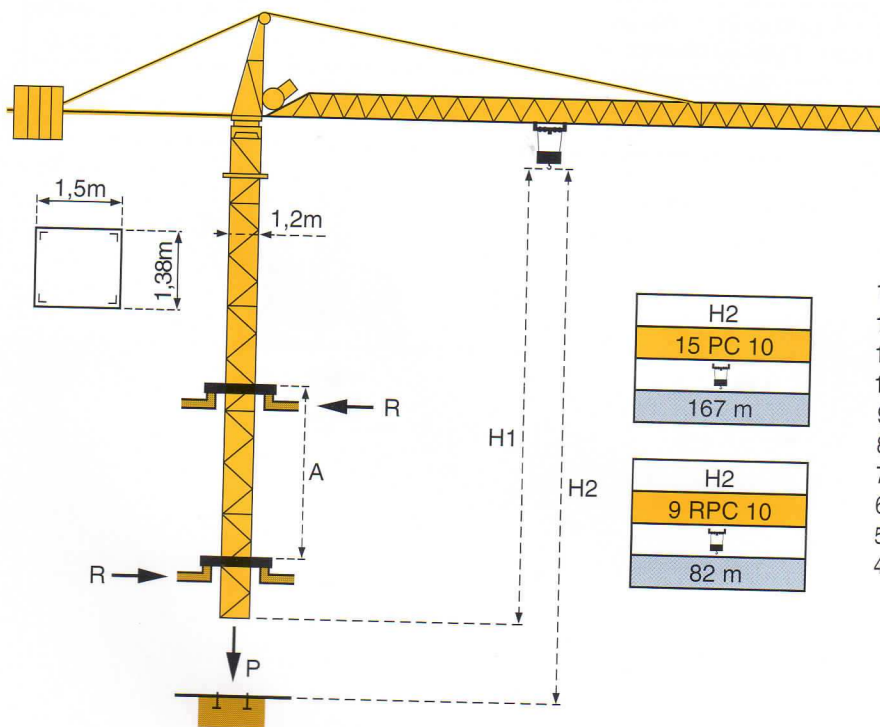

H2	15 PC 10	167 m
H2	9 RPC 10	82 m

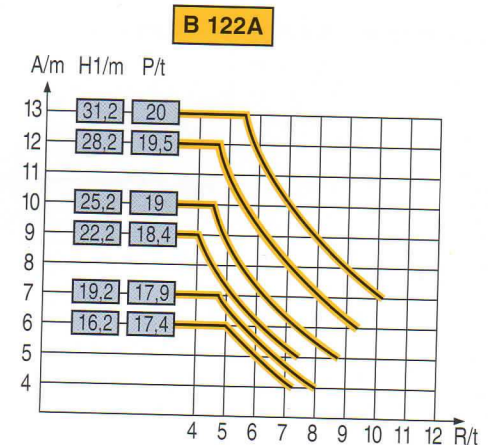

A Distance entre cadres
H1 Hauteur grue
P Poids de la grue (en service)
R Réaction horizontale

A Abstand zwischen den Rahmen
H1 Kranhöhe
P Krangewicht (in Betrieb)
R Horizontalkräfte

A Distance between collars
H1 Crane height
P Crane weight (in service)
R Horizontal reaction

A Distancia entre marcos
H1 Altura grúa
P Peso de la grúa (en servicio)
R Reaccion horizontal

A Distanza fra i telai
H1 Altezza gru
P Peso della gru (in servizio)
R Reazione orizzontale

● En service
■ Hors service

● In Betrieb
■ Ausser Betrieb

● In service
■ Out of service

● En servicio
■ Fuera de servicio

● In servizio
■ Fuori servizio

⊗ A vide sans lest
avec flèche et hauteur
maximum.

⊗ Ohne Last und Ballast
mit Maximalausleger und
Maximalhöhe.

⊗ Without load and
ballast with longest jib
and maximum height.

⊗ Sin carga, sin
lastre con flecha y
altura máxima.

⊗ A vuoto senza zavorra
e con braccio massimo e
altezza massima.

Mécanismes - Antriebe - Mechanisms - Mecanismos - Meccanismi

				m/min	t		ch -PS hp	kW
Levage Heben Hoisting Elevación Sollevamento	9 RPC 10  			6,5	2	165 m	8,2	6
				20	2			
				40	1			
	15 PC 10  			9	2	335 m	15	11
				27	2			
				54	1			
Distribution - <i>Katzfahren</i> - Trolleying <i>Distribución</i> - Distribuzione		1D1V1D		36			1,2	0,9
Orientation - <i>Schwenken</i> - Slewing <i>Orientación</i> - Rotazione		RCO		0,3→1 tr/min U/min-rpm			6,5	4,8
Translation - <i>Kranfahren</i> - Travelling <i>Traslación</i> - Traslazione		TVD 324 C1		26			2 x 4	2 x 2,9
Réseau - <i>Netzstrom</i> - Mains supply - <i>Red</i> - Rete elettrica						CEI 38 IEC 38	400V (+6%-10%) 50Hz	
Puissance électrique nécessaire - <i>Anschlusswert</i> - Necessary electric power <i>Potencia electrica necesaria</i> - Potenza elettrica necessaria						9 RPC : 15 KVA 15 PC : 25 KVA		
Groupe électrogène - <i>Stromaggregat</i> - Generator set - <i>Grupo electrogeno</i> - Gruppo elettrogeno						★		

* Nous consulter - Auf Anfrage - Consult us - Consultarnos - Consultateci

Conforme aux directives CEE 84/534 et 87/405 sur le niveau acoustique - Gemäss EWG-Richtlinien 84/534 und 87/405 für den Schall- Leistungspegel
 In compliance with the EEC 84/534 and 87/405 instructions on noise level - Conforme con las directivas CEE 84/534 y 87/405 sobre el nivel acustico
 Conforme alle direttive CEE 84/534 e 87/405 sul livello acustico



FEM/1-A3

Copyright.Reproduction interdite © POTAIN 1997

POTAIN 

GRUPE LEGRIS INDUSTRIES

18.Rue de Charbonnières, B.P. 173-F 69132 ECULLY Cedex
 Tél. (33)04.72.20.20.20 - Fax (33)04.72.20.20.00
 http://www.potain.fr - E-mail : mkt@potain.fr

POTAIN GmbH Deutschland Tel : 06.105.704.0
 SIMMAPOTAIN Italia Tel : 039.65.631
 Zhangjiagang POTAIN China Tel : 520. 877.1451

CITY CRANE MC 45

Réf. 1997.05.LKX 1

Courtesy of Crane.Market

Modifiche riservate

Modificaciones reservadas

Subject to modification

Änderungen vorbehalten

Modifications réservées

Printed in France

Réalisation SODIPE